


EBIM-2

PLASTIC DECORATIVE BATTERY UNIT

6VDC OUTPUT/120/347VAC INPUT

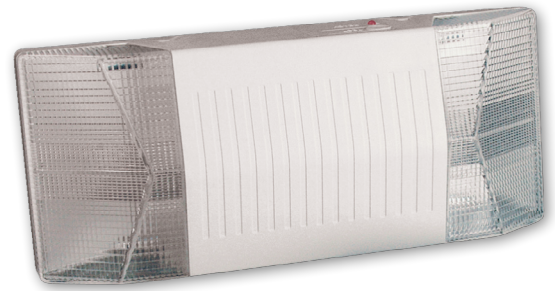

The EBIM-2 series of plastic battery units utilizes a modern design that blends well into current decor styles. The EBIM-2 series is a stand-alone battery unit (not capable of remote load connection) configured with 6VDC output, 30W capacity for 30 minutes duration.

FEATURES & SPECIFICATIONS

CIRCUITRY

- 120/347VAC 60Hz Input, field selectable
- Solid state variable rate charger
- 6VDC emergency power output
- 30W battery capacity
- 30 minutes emergency battery duration standard
- Momentary push button test switch
- Pilot LED for AC ON
- Fully automatic, current limited charger
- Complete battery recharge in 24 hours
- Maintenance free, sealed lead acid battery

MECHANICAL

- High impact, UV stabilized, thermoplastic construction
- Low profile, twin lamp configuration
- Universal spider knockout pattern and keyhole mounting slots stamped into back of cabinet
- Unit "quick snaps" onto backplate for simple, speedy installation
- White color is standard




Note: Not intended for flush ceiling mount.

COMPLIANCE

- ICES-005

APPROVALS

- CSA Certified to C22.2 #141-15

OVERVIEW		
INPUT VOLTAGE	120/347 VAC	
OUTPUT VOLTAGE	6VDC	
 QUICKSHIP  ICES 005 		

EBIM-2

QUICK SHIP ORDERING GUIDE



PART NUMBER	DC VOLTS [VDC]	WATTS [W]	NBR OF HEADS	HEAD	LAMP [W]	LIGHT SOURCE	INPUT VOLTS [VAC]	COLOR
EBIM-2	6	30	2	N/A	7.2	TUNGSTEN	120/347	WHITE

QUICK SHIP: Product availability is subject to change without notice. Please contact your AimLite customer service representative to confirm inventory levels at time of order.


ORDERING GUIDE

EBIM-2	7.2W	WH	
SERIES	LAMP	COLOR	OPTIONS
EBIM-2	7.2W (TUNGSTEN)	WH - WHITE (STANDARD)	LC - LINE CORD

MODEL RATINGS

		WATTAGE CAPACITIES			
MODEL	VOLTAGE	30 MIN.	60 MIN.	90 MIN.	120 MIN.
EBIM-2	6VDC	30	15	N/A	N/A

DIMENSIONS

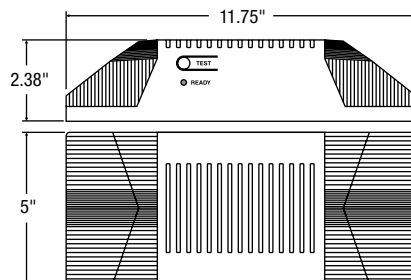

For complete warranty details, please see our terms and conditions on our website