

EBPH-5L

PLASTIC BATTERY UNIT



The commercial EBPH-5L features a plastic battery unit designed to provide an economical and versatile solution to emergency lighting needs within a small and compact design. The EBPH-5L series is configured with two 5W LED heads and can run for 120 minutes duration as a standalone unit.

FEATURES & SPECIFICATIONS

CIRCUITRY



- 120/277 VAC Input
- Solid state variable rate charger
- 120 minutes emergency power duration
- Momentary push button test switch
- Pilot LED for AC ON and CHARGE status
- Fully automatic, current limiter charger
- Short circuit protection
- 9.6V maintenance free, lithium iron phosphate battery

MECHANICAL

- Thermoplastic construction
- 2x 5W LED
- Lamp heads provide up to 100ft
- Wall and ceiling mount
- White colour standard

APPROVALS

- CSA C22.2 #141-15

OVERVIEW			
LIGHT SOURCE	LED	INPUT VOLTAGE (V AC)	120/277/347
EMERGENCY DURATION	120 MINUTES		
 LED 			


Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

EBPH-5L

TECHNICAL SPECIFICATION TABLE

PART NUMBER	NO. OF HEADS	DC VOLTS (V DC)	WATTS	LAMP (W)	LIGHT SOURCE	INPUT VOLTS (V AC)	COLOUR
EBPH-5L	2	10	27	5	LED	120/277/347	WHITE

DIMENSIONS

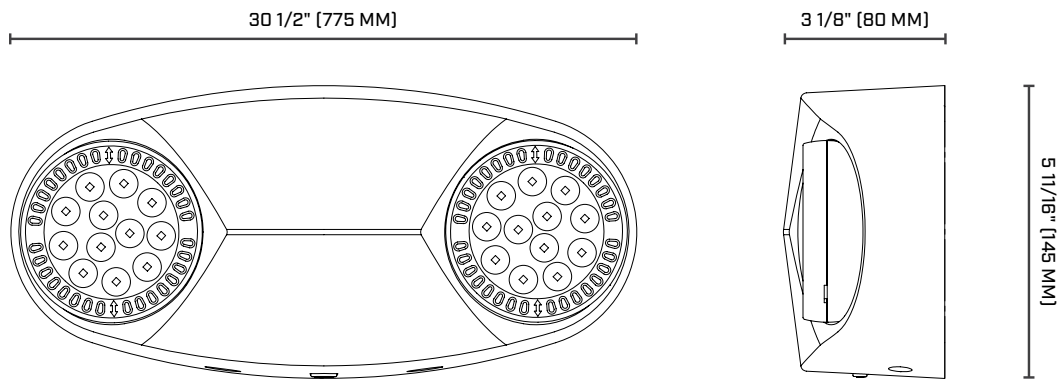

SPACING GUIDE

MOUNTING HEIGHT	SPACING CENTER TO CENTER (FT)
9 FT	115
10 FT	112
12 FT	108

LUMEN TABLE

DESCRIPTION	WATT	LUMEN	LUMEN PER WATT
EBPH-5L	10	581	58.1